





Light distribution diagram 60°

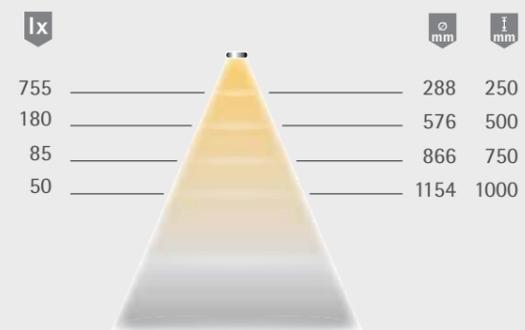

Light box

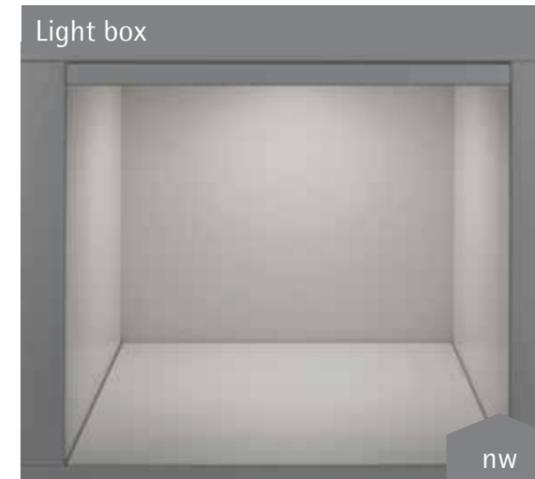

## EcoPower Flood

### Advantages

- ▶ Entry-level recessed spotlight
- ▶ Compact light

### Examples of use

- ▶ Shelves
- ▶ Display cabinets

### Features

- ▶ For 58 mm mounting diameter
- ▶ Wide beam without shadows



### Technical details



12V

Luminaire type: LED recessed light  
 Type of lighting: Functional / accent lighting  
 Surface finish: Aluminium look / stainless steel look  
 Operating voltage: 12 V DC  
 Light colour: WarmWhite/ NeutralWhite  
 Colour rendering: RA > 80  
 Luminous flux: 150 lm  
 Luminaire efficiency: 88 lm/W  
 Light source efficiency: 106 lm/W  
 Life span: 40,000 h (L70)  
 Power consumption: 1.7 W  
 Dimmable: Yes/PWM/Smart.home  
 Beam angle: 90°  
 Half value angle: 60°  
 Test mark and symbols: CE, RoHS, Energy Star, ENEC  
 Protection rating: IP 44  
 Installed diameter: 58 - 61 mm  
 Supply lead: 2000 mm  
 Plug connector: LED mini  
 Connection to: M1 plug connector LED ballast

Dimensional drawing / installation

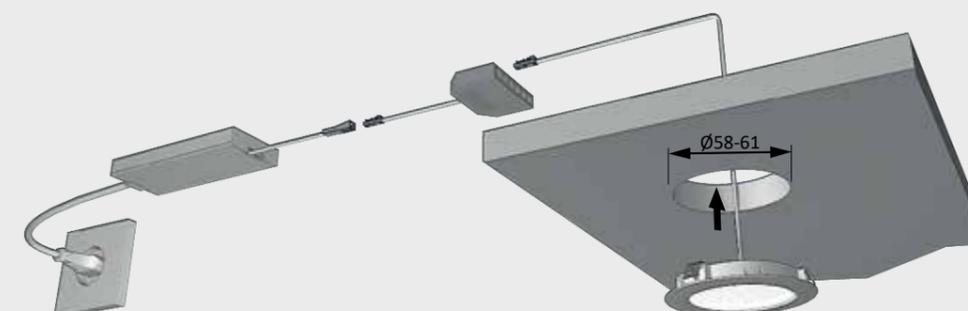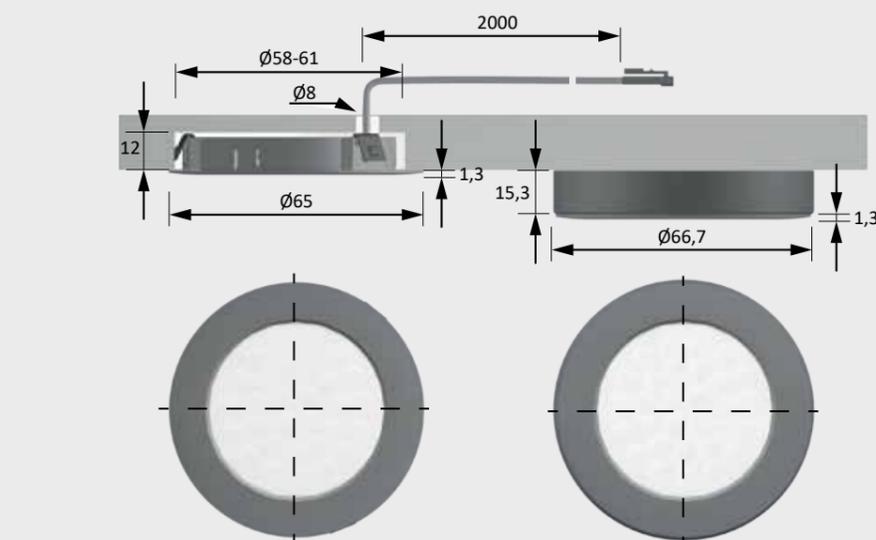

### EcoPower Flood

	WarmWhite	NeutralWhite
Aluminium look	32 341 16	32 341 06
Stainless steel look	32 341 19	32 341 09

### Accessories\*

Surface-mounted housing in aluminium look	36 240 06
Surface-mounted housing in stainless steel look	36 240 09
LED ballast 20 W with flat Euro plug	31 016 01
M1 extension lead 1800 mm	36 768 01
M1 3-way distributor 180 mm	36 852 01
M1 6-way distributor 2000 mm	36 125 01

\* Further accessories in section Switch systems