





Light distribution diagram 50°

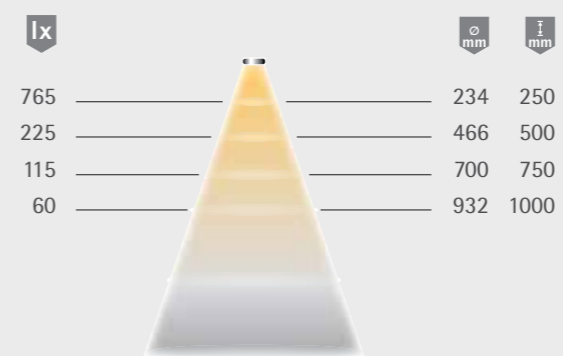

Light box

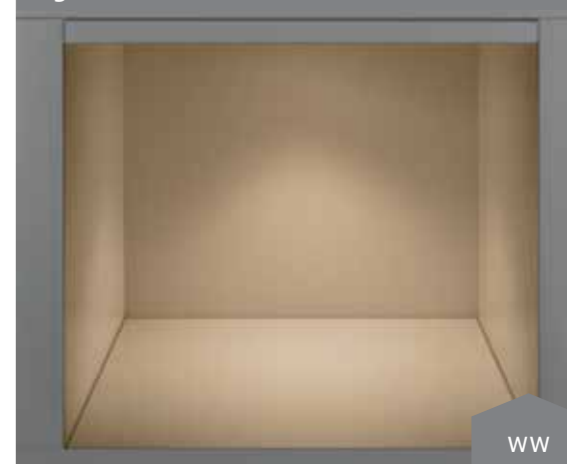

StarPoint Flood

Advantages

- ▶ Powerful LED spotlight
- ▶ Accentuation by small beam angle
- ▶ Versatile

Examples of use

- ▶ Shelves
- ▶ Display cabinets
- ▶ Furniture halo lighting

Features

- ▶ Recessed light with 30 mm installed diameter

Technical details



Luminaire type: LED recessed light
Type of lighting: Functional / accent lighting
Surface finish: chrome
Operating voltage: 12 V DC
Light colour: WarmWhite/ NeutralWhite
Colour rendering: RA >80
Luminous flux: 95 lm
Luminaire efficiency: 80 lm/W
Light source efficiency: 95 lm/W
Life span: 40,000 h (L70)
Power consumption: 1.2 W
Dimmable: Yes/PWM/Smart.home
Beam angle: 80°
Half value angle: 50°
Test mark and symbols: CE
Protection rating: IP 20
Installed diameter: 29-32 mm
Supply lead: 1800 mm
Plug connector: LED mini
Connection to: M1 plug connector LED ballast

StarPoint Flood

	WarmWhite	NeutralWhite
chrome	32 146 13	32 146 03

Accessories*

LED ballast 20 W with flat Euro plug	31 016 01
M1 extension lead 1800 mm	36 768 01
M1 3-way distributor 180 mm	36 852 01
M1 6-way distributor 2000 mm	36 125 01

* Further accessories in section Switch systems

Dimensional drawing / installation

