



MultiSwitch² PIR

Advantages

- ▶ Motion sensor for surface mounting
- ▶ Responds to heat and movement
- ▶ Connection of 1 up to 4 identical sensors to a Master unit

Features

- ▶ Soft ON/OFF function (soft-start when power Switching on/off only with 12/24 Volt DC)
- ▶ Memory function for power failure
- ▶ Not compatible with dimmers

Examples of use

- ▶ Ideal for walk-in wardrobes without fronts
- ▶ Problem-solver for furniture where no magnetic or IR sensor can be used

Order information

- ▶ For further sensors see other pages

MultiSwitch PIR (motion sensor)

PIR sensor for surface mounting (motion sensor)	30 152 01
Screw-on PIR sensor (motion sensor, black)	30 152 05
Master unit 230 Volt AC-500 W with Euro flat plug	30 141 01
Master unit 12 Volt DC-36 W*	30 142 01
Master unit MultiWhite 12 Volt DC-36 W**	30 144 01
Master unit 24 Volt DC-20 W*	30 143 01

Accessories

Repeater 12 Volt DC	30 263 07
Repeater 24 Volt DC	30 263 08
Extension lead sensor cable 3000 mm***	36 830 01

* Only for use with dimmable LED luminaires
 ** Can be used behind MultiWhite controls
 *** Maximum one per sensor

Technical details




For use with: LED lights
 Max. switching power: 12 Volt DC-36 W
 24 Volt DC-120 W
 230 V AC - max. 500 W

Test marks and symbols: CE, ENEC, TÜV

Motion sensor
 Sensing angle: 120°
 Range: 2 m
 Stay-'ON' time: 30 seconds
 Sensor lead: 3000 mm
 Master unit
 Supply lead: HV 3000 mm
 LV 2000 mm
 Switching lead: HV 150 mm
 LV 300 mm
 Standby: <0.5 W - Master unit sensors included

Dimensional drawing / installation

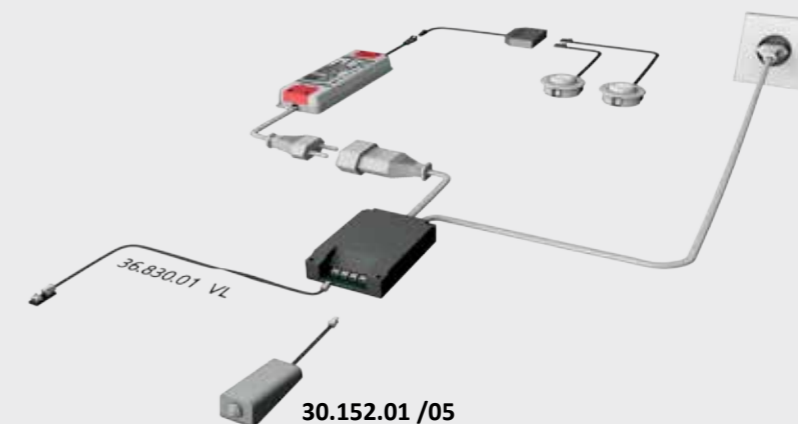

Max. 4x 30.152.01 / 30.152.05

