



HandleLine

Advantages

- ▶ High-quality aluminium profile light
- ▶ Can be individually cut to size
- ▶ Handle strip and niche lighting in one Profile combined

Features

- ▶ Fits perfectly on 16 mm floors and walls
- ▶ When connected directly to an electronic ballast, the light colour is XtraWarmWhite (2700K)

Examples of use

- ▶ Handleless fronts in the kitchen
- ▶ Wall cabinet with door

HandleLine

	STS / Opal	Black / Opal	Black / Black
267 mm (2.4 W)	55 753 01	55 753 11	55 753 21
317 mm (2.9 W)	55 753 08	55 753 18	55 753 28
367 mm (3.4 W)	55 753 09	55 753 19	55 753 29
417 mm (3.9 W)	55 753 02	55 753 12	55 753 22
467 mm (4.4 W)	55 753 03	55 753 13	55 753 23
567 mm (5.3 W)	55 753 04	55 753 14	55 753 24
867 mm (8.2 W)	55 753 05	55 753 15	55 753 25
967 mm (9.2 W)	55 753 06	55 753 16	55 753 26
1167 mm (11.1 W)	55 753 07	55 753 17	55 753 27

Accessories*

S-Mitter Basic MultiWhite Smart Set**	31 123 01
LED ballast 20 W with flat Euro plug	31 016 01
M1 extension lead 1800 mm	36 768 01
M1 3-way distributor 180 mm	36 852 01
M1 6-way distributor 2000 mm	36 125 01

* Further accessories in section Switch systems
** MultiWhite accessories required


Technical details




Luminaire type: LED recessed light
Type of lighting: Functional lighting
Surface finish: Stainless steel look/Black
Operating voltage: 12 V DC
Light colour: MultiWhite
Colour rendering: RA >90; R9 >60
Luminous flux: 560 lm/m
Luminaire efficiency: 60 lm/W
Light source efficiency: 90 lm/W
Life span: 40,000 h (L70)
Power consumption: see ordering chart
Dimmable: Yes/PWM/Smart.home
Beam angle: 90°
Half value angle: 60°
Test marks and symbols: CE, RoHS, Energy Star
Protection class: IP 20
Supply lead: 1900 mm
Plug connector: LED mini
Connection to: M1 plug connector, LED ballast, MultiWhite control unit

Light distribution diagram 60°

Type STS/Opal – other combinations may vary

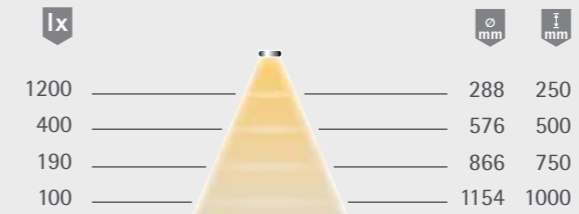

Light box

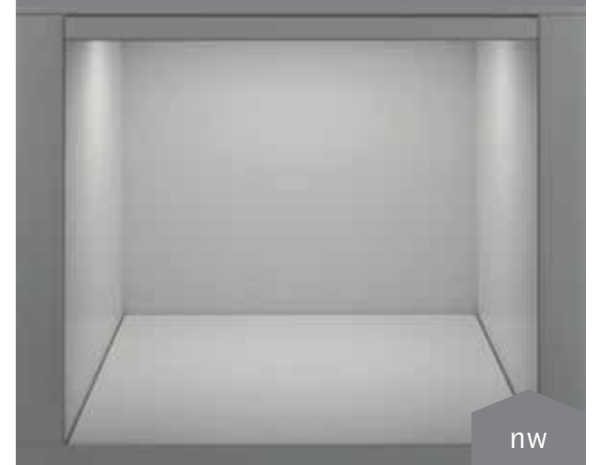

Dimensional drawing / installation

Can be individually cut to size

