



## FineLite

### Advantages

- ▶ Filigree LED recessed light
- ▶ Can be individually cut to size
- ▶ Uniform illumination without dark zones
- ▶ Customisable to desired length

### Features

- ▶ Glare-free thanks to translucent opal cover
- ▶ No visible LED dots

### Examples of use

- ▶ Shelves
- ▶ Compartments
- ▶ Lighting halos

### Order information

- ▶ When shortening the luminaire, an additional end cap is required
- ▶ For cut-to-measure lengths, please specify the exact length alongside the order number!

### FineLite

	WarmWhite	NeutralWhite
400 mm (3.4 W)	32 180 51	32 983 51
550 mm (5.4 W)	32 180 52	32 983 52
850 mm (8.4 W)	32 180 53	32 983 53
200 - 300 mm (max. 2.4 W)*	32 180 01	32 983 01
301 - 400 mm (max. 3.4 W)*	32 180 02	32 983 02
401 - 500 mm (max. 4.4 W)*	32 180 03	32 983 03
501 - 600 mm (max. 5.4 W)*	32 180 04	32 983 04
601 - 700 mm (max. 6.4 W)*	32 180 05	32 983 05
701 - 800 mm (max. 7.4 W)*	32 180 06	32 983 06
801 - 900 mm (max. 8.4 W)*	32 180 07	32 983 07
901 - 1000 mm (max. 9.4 W)*	32 180 08	32 983 08
1001 - 1100 mm (max. 10.4 W)*	32 180 09	32 983 09
1101 - 1200 mm (max. 11.4 W)*	32 180 10	32 983 10

### Accessories\*

LED ballast 20 W with flat Euro plug	31 016 01
M1 extension lead 1800 mm	36 768 01
End cap	26 020 01


\* Further accessories in section Switch systems

### Technical details




**Luminaire type:** LED recessed light  
**Type of lighting:** Functional lighting  
**Surface finish:** Aluminium look  
**Operating voltage:** 12 V DC  
**Light colour:** NeutralWhite/ WarmWhite  
**Colour rendering:** RA >90; R9 >20  
**Luminous flux:** 380 lm/m  
**Luminaire efficiency:** 40 lm/W  
**Light source efficiency:** 90 lm/W  
**Life span:** 40,000 h (L70)  
**Power consumption:** see ordering chart  
**Dimmable:** Yes/PWM/Smart.home  
**Beam angle:** 90°  
**Half value angle:** 60°  
**Test mark and symbols:** CE, RoHS, Energy Star  
**Protection rating:** IP 20  
**Supply lead:** 1800 mm  
**Plug connector:** LED mini  
**Connection to:** M1 plug connector LED ballast

### Light distribution diagram 60°

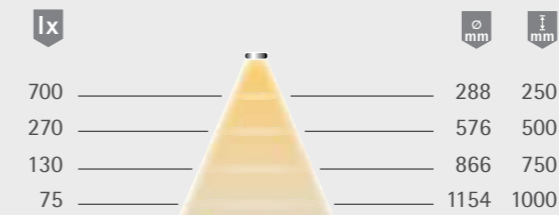

### Light box

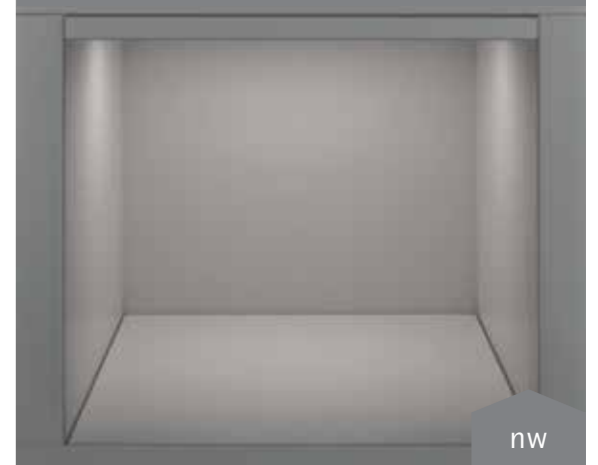

### Dimensional drawing / installation

Can be individually cut to size

Light can be made to measure

