



Versa Inside 40

- Advantages

 - ▶ 30 % more uniform light distribution
 - ▶ 30 % more efficient
 - ▶ 30 % more light
 - ▶ 0% more power consumption than the predecessor Versa Inside 30

Features

 - ▶ Lead on both sides for the 5000 mm length (one cut, two lights), see drawing
- Examples of use

 - ▶ Ideal for ambient backlighting in living rooms

Order information

 - ▶ Feeders and/or solder leads needed for the 10 m roll
 - ▶ For selection see Versa- and Channelline overview

Versa Inside 40		WarmWhite
1200 mm (max. 2.9 W)		56 000 12
5000 mm (max. 12 W)		56 000 13
10000 mm (max. 2.4 W/m)		56 000 11

Accessories*		
	1 piece	10 piece
Direct connector	36 362 01	36 362 11
Flexible connector 50 mm	36 363 01	36 363 11
Flexible connector 150 mm	36 364 01	36 364 11
Feeder 1800 mm for sections	36 365 01	-
Soldering lead 130 mm for sections	39 297 38	-
Soldering lead 1800 mm for sections	36 248 01	-
LED ballast 15 W with flat Euro plug	30 996 17	-
LED ballast 30 W with flat Euro plug	31 002 07	-
M1 extension lead 1800 mm	36 768 01	-
M1 3-way distributor 180 mm	36 852 01	-

* Further accessories in section Switch systems

Technical details



Luminaire type: Surface-mounted light

Type of lighting: Accent lighting

Operating voltage: 12 V DC

Light colour: WarmWhite

Colour rendering: RA >90; R9 >60

Luminous flux: 300 lm/m

Light source efficiency: 125 lm/W

Life span: 40,000 h (L70)

Power consumption: 2.4 W/m

Max. length at a stretch: 7 m

Dimmable: Yes/PWM/Smart.home

LED count: 40/m

Beam angle: 120°

Half value angle: 70°

Test mark and symbols: CE, RoHS, Energy Star, etc.


Protection rating: IP 20

Supply lead: 1800 mm

Plug connector: LED mini connector M1 (max. 36 W)

Connection to: LED ballast

Light distribution diagram 70°

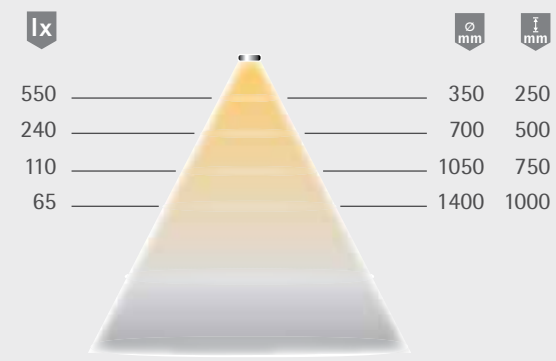

Light box



Dimensional drawing / installation Can be individually cut to size

