




Light distribution diagram 70°



Light box

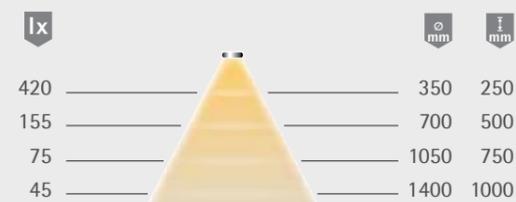

## Versa SuperPlus

### Advantages

- ▶ Evenly illuminated area
- ▶ Lateral bending direction (see drawing)
- ▶ Flush mounting possible
- ▶ Can be individually cut to size

### Features

- ▶ Protection against water jets from all directions (IP 65)
- ▶ Suitable for damp locations
- ▶ Supply lead on both sides (one cut, two lights), see drawing

### Examples of use

- ▶ Round counters
- ▶ Decorative surfaces with visible curves
- ▶ Particularly narrow cabinet interior lighting

### Order information

- ▶ Packaging unit consists of 1 piece Versa, 2 end caps and a silicone tube for sealing in wet room applications

### Versa Super Plus

	WarmWhite	NeutralWhite
2500 mm (max. 18.8 W)	55 815 11	55 815 02
5000 mm (max. 37.5 W)	55 815 10	55 815 01
Sample piece 1000 mm (max. 7.5 W)	55 815 15	55 815 05

### Accessories\*





LED ballast with Euro flat plug (75 W)	31 017 01
LED ballast with Euro flat plug (150 W)	30 017 11
MP2 2-way distributor	39 422 51
MP2 6-way distributor	36 996 01

### Technical details



**Luminaire type:** Surface-mounted light  
**Type of lighting:** Accent lighting  
**Operating voltage:** 24 V DC  
**Light colours:** WarmWhite/NeutralWhite  
**Colour rendering:** RA >80  
**Luminous flux:** 400 lm/m  
**Light source efficiency:** 53 lm/W  
**Life span:** 40,000 h (L70)  
**Power consumption:** 7.5 W/m  
**Max. length at a stretch:** 5 m  
**Dimmable:** Yes/PWM/Smart.home  
**Beam angle:** 120°  
**Half value angle:** 70°  
**Test marks and symbols:** CE, RoHS, Energy Star  
**Protection rating:** IP 65 (Only in the gated area)  
**Supply lead:** 2 x 1800 mm  
**Plug connector:** LED MultiPlug MP2 (max. 192 W)  
**Connection to:** LED ballast

Dimensional drawing / installation

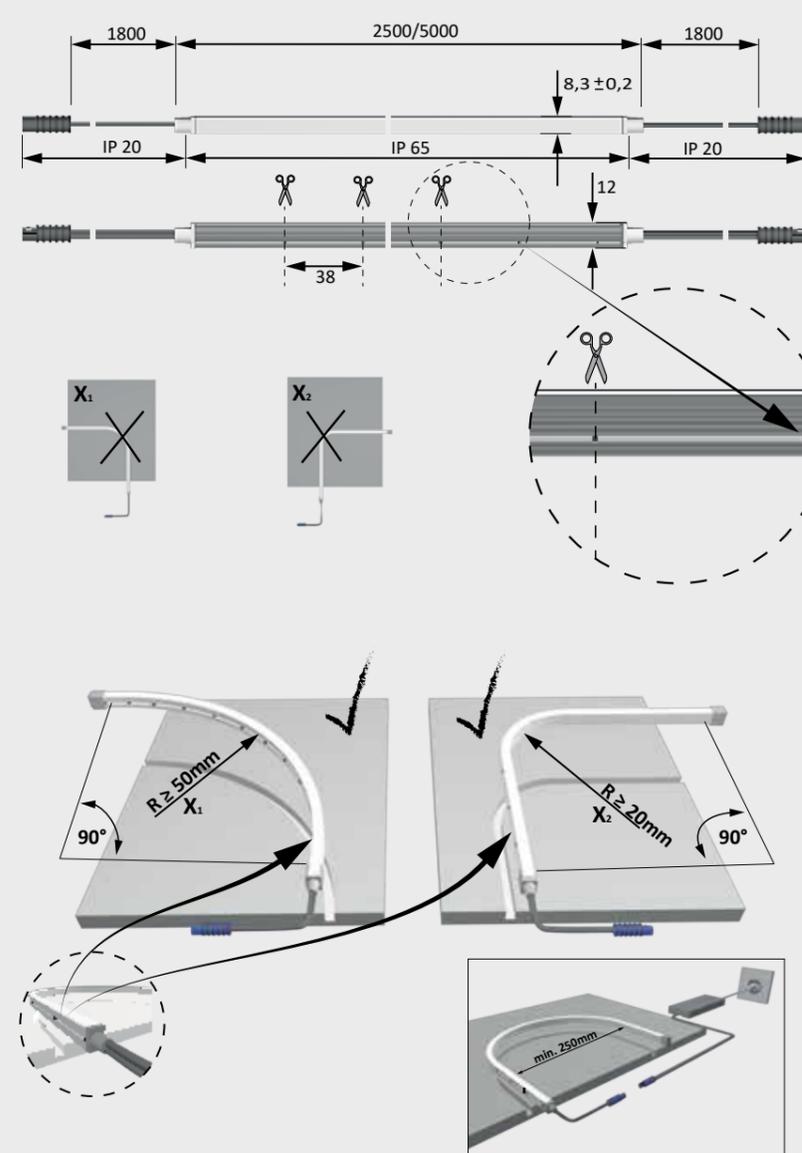

\* Further accessories in section Switch systems