



## ChannelLine D

### Advantages

- ▶ High-quality flat recessed/surface-mounted profile
- ▶ For flush mounting
- ▶ Cover can be attached from above or from the side

### Features

- ▶ New opal cover - 30% more light and only slight change in light colour
- ▶ Homogeneous light line with Versa Inside from 160 LED/m with opal diffuser
- ▶ Very wide beam angle of approx. 110°

### Examples of use

- ▶ Flush with the inside of the cabinet
- ▶ Retrofitting in niches

### Order information

- ▶ Use of feeders and connectors in the profile possible
- ▶ To increase the luminosity, two Versa Inside can be attached side by side
- ▶ For selection see ChannelLine overview

### ChannelLine D

	Alu/Opal	Alu/Clear	Black/Opal	Black / Black
2000 mm	55 873 01	55 662 11	55 873 05	55 873 07
2000 mm (set of 10)	55 873 11	55 662 15	55 873 15	55 873 17
3000 mm	55 873 02	55 662 12	55 873 06	55 873 08
3000 mm (set of 10)	55 873 12	55 662 16	55 873 16	55 873 18
End cap (set of 2) lacquered	25 570 01	25 570 01	25 570 05	25 570 05
Sample piece profile 300 mm	50 005 01	50 005 01	50 006 01	50 006 01
Sample piece cover 300 mm	50 009 01	50 010 01	50 009 01	50 011 01
Cleaning cloth (isopropanol)	36 502 01	36 502 01	36 502 01	36 502 01

### Technical details




### Recommended for:

Versa Inside 120  
Versa Inside 160  
Versa Linear



### Dimensional drawing / installation

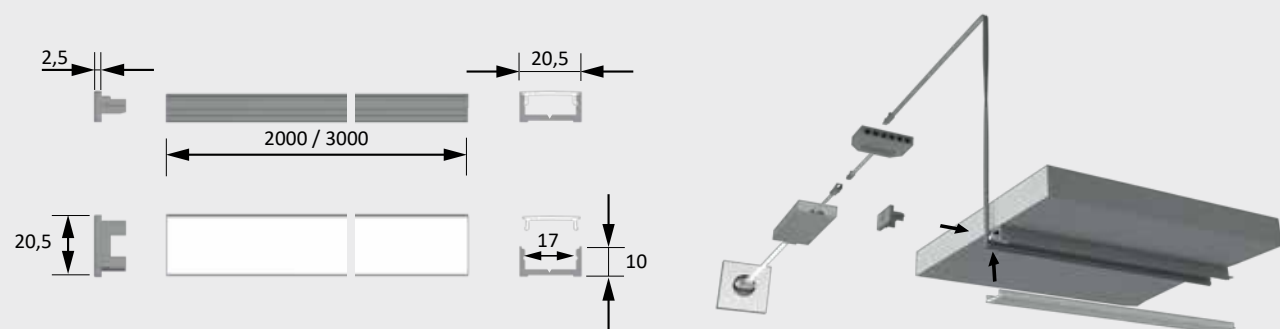

## ChannelLine D2

### Advantages

- ▶ High-quality deep recessed/surface-mounted profile
- ▶ For flush mounting
- ▶ Cover can be attached from above or from the side

### Features

- ▶ New opal cover - 30% more light and only slight change in light colour
- ▶ Homogeneous light line with Versa Inside from 120 LED/m with opal cover
- ▶ Wide beam angle of approx. 75°

### Examples of use

- ▶ Flush with top shelves
- ▶ Retrofitting in niches
- ▶ Mirror frame lighting

### Order information

- ▶ Use of feeders and connectors in the profile possible
- ▶ To increase the luminosity, two Versa Inside can be attached side by side
- ▶ For selection see ChannelLine overview

### ChannelLine D2


	Alu/Opal	Black/Opal	Black / Black
2000 mm	55 870 01	55 870 21	55 870 07
2000 mm (set of 10)	55 870 05	55 870 25	55 870 17
3000 mm	55 870 02	55 870 22	55 870 08
3000 mm (set of 10)	55 870 06	55 870 26	55 870 18
End cap (set of 2) lacquered	25 774 01	25 774 05	25 774 05
Sample piece profile 300 mm	50 007 01	50 008 01	50 008 01
Sample piece cover 300 mm	50 009 01	50 009 01	50 011 01
Cleaning cloth (isopropanol)	36 502 01	36 502 01	36 502 01

### Technical details



### Recommended for:

Versa Inside 120  
Versa Inside 160



### Dimensional drawing / installation

