



SuperSwing

Advantages

- Extremely bright
- Swiveling

Features

- Adjustable light cone
- Focusable light
- Recessed light with 68 mm installed diameter

Examples of use

- For recessing in ceiling
- Shop fittings

SuperSwing

	WarmWhite	NeutralWhite
Aluminium look	55 710 16	55 710 06

Accessories


LED ballast 30 W with flat Euro plug	31 002 07
M1 extension lead 1800 mm	36 768 01
M1 3-way distributor 180 mm	36 852 01
M1 6-way distributor 2000 mm	36 125 01

Technical details




Luminaire type:	LED recessed light
Type of lighting:	Functional lighting
Surface finish:	Aluminium look
Operating voltage:	12 V DC
Light colour:	WarmWhite/ NeutralWhite
Colour rendering:	RA >80
Luminous flux:	450 lm
Luminaire efficiency:	78 lm/W
Light source efficiency:	95 lm/W
Life span:	40,000 h (L70)
Power consumption:	5.8 W
Dimmable:	Yes/PWM/Smart.home
Beam angle:	90°
Half value angle:	30°/50°
Test mark and symbols:	CE
Protection rating:	IP 20
Installed diameter:	68 mm
Supply lead:	150 mm
Plug connector:	LED mini M1 plug connector
Connection to:	LED ballast

Light distribution diagram 50°

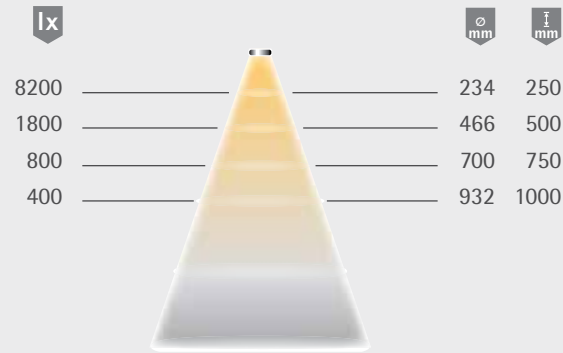

Light box

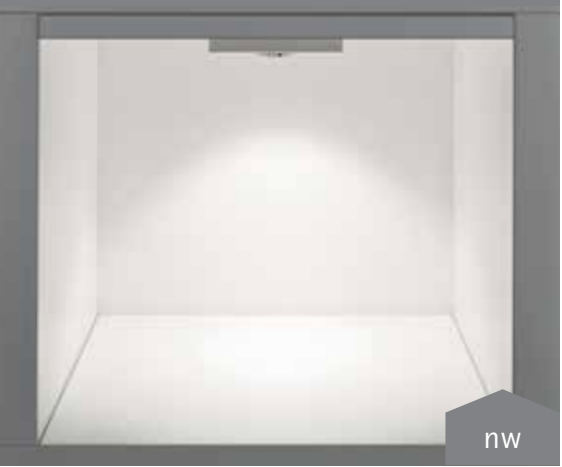

Dimensional drawing / installation

